



TECH MASTER GPP410 SERIES

4.5 Purity Single Stage Brass Barstock Diaphragm Outlet Point Regulator -Acetylene

Tech Master GPP410 series single stage diaphragm outlet point regulators are designed for secondary pressure gas control of technical grade Acetylene gas up to 4.5 purity (99.995%), on gas distribution systems.

■ **GPP410 Series** | Single Stage Diaphragm Outlet Point Regulator - Acetylene



FEATURES

Three port configuration

Rear point mounting (1/4 NPT male)

Encapsulated seat design

Low wetted surface area

Full range of outlet fittings

Rear entry



MATERIALS

Body	Brass Barstock			
Bonnet	High Strength Alloy			
Diaphragm	Polychloroprene (Neoprene®) (CR)			
Seat	Polyamide (Nylon®)			
Filter	10 Micron 316L Stainless Steel			




SPECIFICATION

Maximum Inlet Pressure	25 bar (360 PSI)			
Delivery Pressure Range	1 bar (15 PSI) / 1.5 bar (22 PSI)			
Gauges	50mm (2") Diameter			
Ports	1/4" NPT Female			
Temperature Range	-20° C to +60° C (-4° F to +140° F)			
Flow Coefficient (Cv)	0.1			
Weight	1.1 kg (2.5 lb)			



FLOW PERFORMANCE

1.5 bar Inlet Pressure @ 21° C












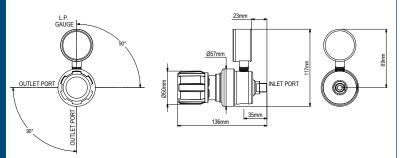

- Adjustable Pressure Regulator - P2 Pressure Gauge

Model No. Selector Guide										
Product Type	Inlet Pressure	Outlet Pressue	Inlet Pressure Gauge	Outlet Pressure Gauge	Inlet/Cylinder Connection	Outlet Connection	Options			
GPP410	01 25 bar / 360 PSI	01 -1 - 1 bar / 15 PSIG	00 No Gauge Fitted	00 No Gauge Fitted	004 1/4 NPT Male	00 No Outlet	A No Options Selected			
		02 -1 - 1.5 bar / 22 PSIG		01 bar/PSI		01 1/8 Stainless Steel Compression	K Certificate of Conformity			
				10 Plugged Port		02 1/4 Stainless Steel Compression	P Calibration / Pressure Test Certificate			
						03 6mm Stainless Steel Compression	X Special Instruction			
						04 1/4 NPT Male				
						05 1/4 SAE Flare Brass Male				
						08 G3/8 BSP L/H Brass Male				
						10 Isolation Valve, 1/4 NPT Female, EPDM Seal				
						12 Isolation Valve, 1/8 Stainless Steel Compression, EPDM Seal				
						14 Isolation Valve, 1/4 Stainless Steel Compression, EPDM Seal				
						16 Isolation Valve, 6mm Stainless Steel Compression, EPDM Seal				
						18 Isolation Valve, 1/4 NPT Male, EPDM Seal				
						22 Isolation Valve, G3/8 BSP L/H Brass Male, EPDM Seal				