


Tech Master GPB4000 Series

4.5 Purity Brass Barstock Outlet Point

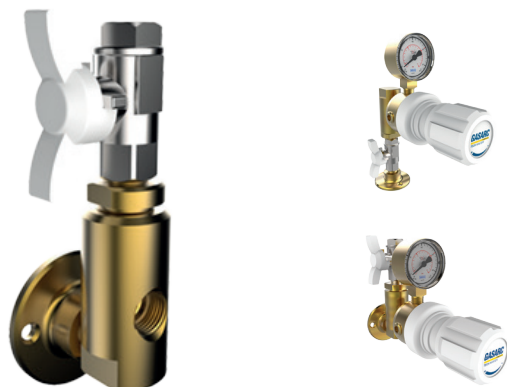

Regulator GPP400 needs to be ordered separately

The **Tech Master GPB4000** Series outlet points are designed for use in conjunction with the **GPP400** Series outlet point regulators for the secondary pressure gas control of non-corrosive or toxic, technical grade gases up to 4.5 purity (99.995%), on gas distribution systems.

- **GPB4001** Series | Wall Mounting Outlet Point, FKM Seal
- **GPB4002** Series | Wall Mounting Outlet Point, EPDM Seal
- **GPB4011** Series | Bench Mounting Outlet Point, FKM Seal
- **GPB4012** Series | Bench Mounting Outlet Point, EPDM Seal

★ FEATURES

- Isolation valve
- Non-return valve
- Wall and bench mounting
- Full range of inlet and outlet fittings



🔧 MATERIAL

- **Body** Brass Barstock
- **Seal** FKM/EPDM


👍 SPECIFICATION

- **Maximum Inlet Pressure** 25 bar (360 PSI)
- **Ports** 1/4" NPT Female
- **Temperature Range** -20° C to +60° C (-4° F to +140° F)
- **Weight** 0.55 kg (1.21 lb) maximum

✓ FLOW PERFORMANCE

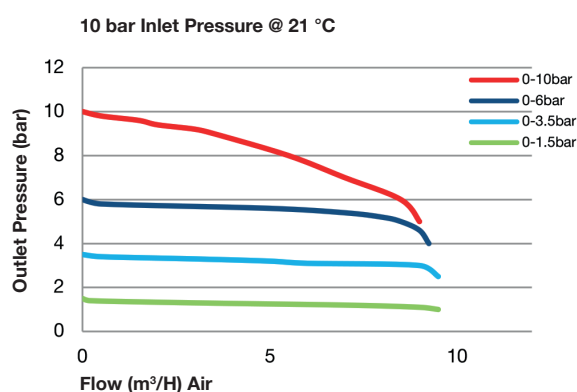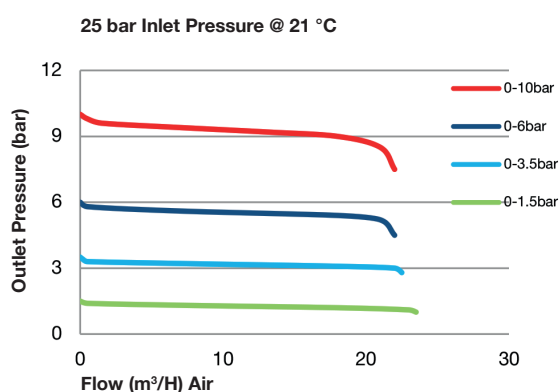

 **DRAWINGS**

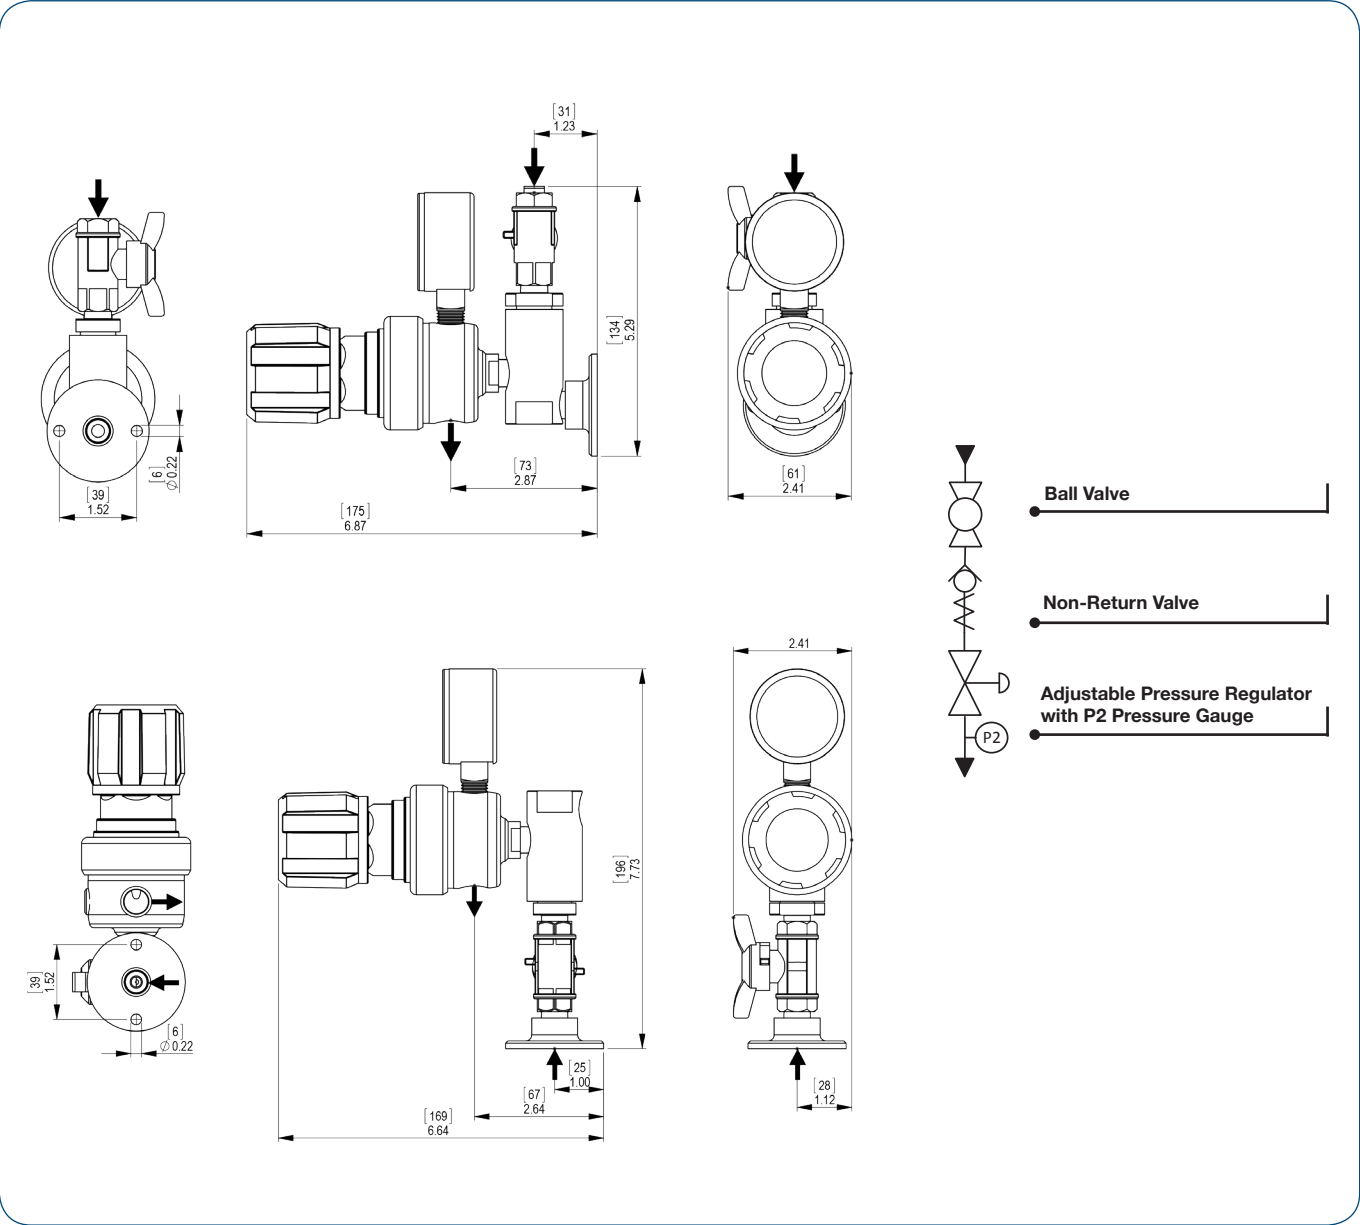

1 2 3 MODEL NO. SELECTOR GUIDE

Example for a Model No. for GPB4000 Series

GPB4001-		01-	001-		01-	A	
Product Type	Inlet Pressure Bar [PSI]		Inlet Connection		Outlet Connection		Options
GPB4001	01	25 bar [360]	000	No Outlet Fitted (1/4 NPT F)	00	No Outlet Fitted (1/4 NPT F)	A No Options Selected
GPB4002			001	1/8 Stainless Steel Compression			K Certificate of Conformity (CoC)
GPB4011			002	1/4 Stainless Steel Compression			N Fitted Flashback Arrestor – Oxygen
GPB4012			003	6mm Stainless Steel Compression			P Calibration / Pressure Test Certificate
			004	1/4 NPT Male			V Fitted Flashback Arrestor – Fuel gas 5 bar
			007	G3/8 BSP R/H Brass Male			W Fitted Flashback Arrestor – Fuel gas 10 bar
			008	G3/8 BSP L/H Brass Male			X Special Instruction
			009	15mm Pipe Adaptor LH			